

castello

— ultra wide —

by lamparke

walk on art

CARB 2
COMPLIANT

ultra
core

hydro+

AC5

30 Yrs.
warranty*

organic texture | ultra-wide format |
soft tones | built to last

B
V
G

ultra core

swell rate
<10%

black core

hdf density
>900kgs/m³


black hdf core: built tough, stays flawless

castello flooring incorporates an ultra-dense black hdf (high-density fiberboard) core, engineered to provide superior structural integrity and resistance to moisture. the extreme density of this core significantly reduces water absorption, which minimizes swelling and warping even in high-humidity environments.

this enhanced stability ensures the flooring remains flat and durable over time, maintaining its flawless appearance and performance under daily wear and tear. designed for longevity, the black hdf core forms the backbone of a reliable, high-quality laminate floor.



100 h water
resistance

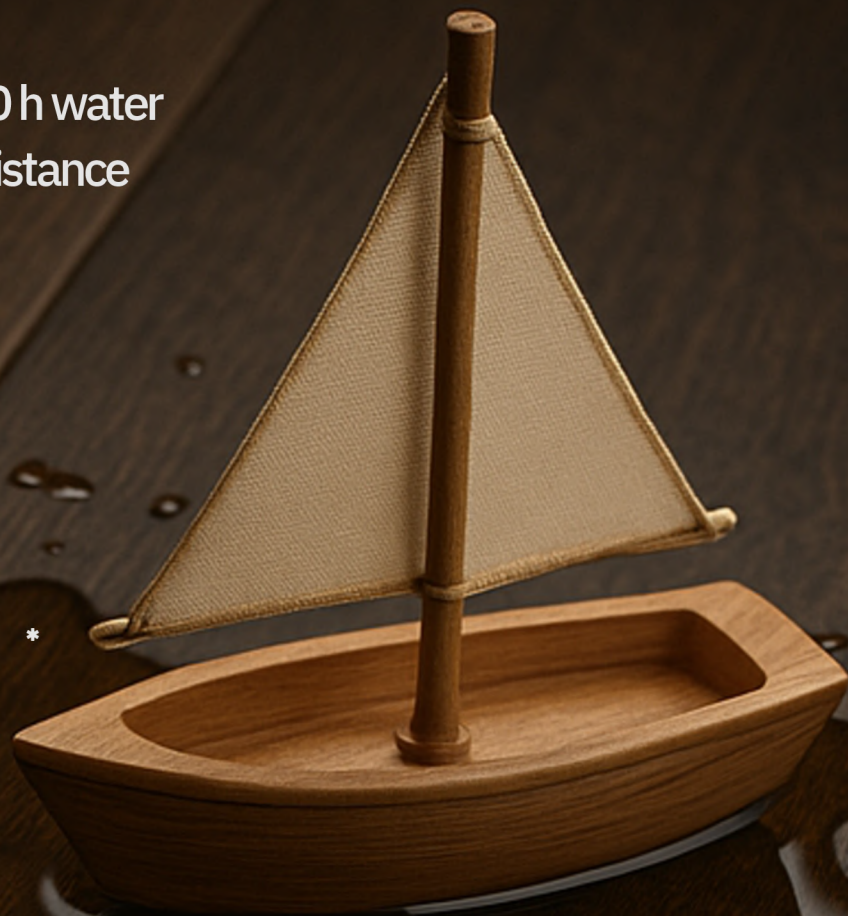

water resistant
flooring

CARB 2
COMPLIANT


swell rate
<10%

structure at a glance



ultra-core laminate

thickness swelling rate is only **<10%**

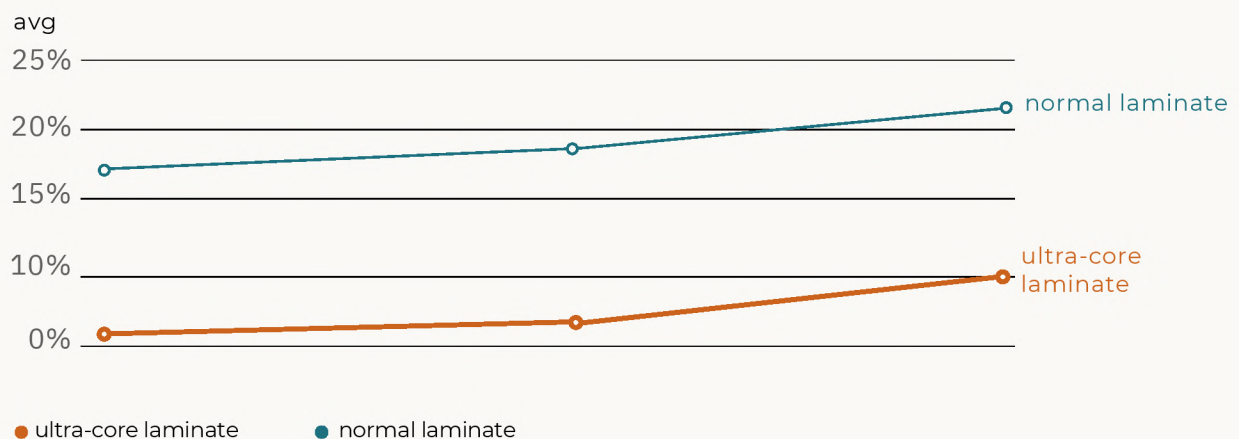



castello – redefining modern living with grandeur.

immerse yourself in striking designs and exceptional durability with ultra-wide, long planks that bring a powerful statement to every space.

crafted for those who chase horizons without losing touch with grace, castello weaves resilience into artistry. its planks, vast and commanding, hold stories within their grains – each textured ridge and silent crack echoing forests kissed by time. beneath your feet lies not just flooring, but a canvas of nature reborn, grounding your modern world in warmth and quiet strength.

with usage class 33, abrasion class 5, and a **30-year residential warranty**, this is beauty that endures— even when life never slows.

4406 | mocha grain



fast installation

fast installation, no wait with our advanced click system, installation is effortless—just lock the planks in place and you're ready to use. enjoy immediate results with a seamless finish.



comfort in every step

gentle underfoot and kind to your joints, this floor feels as good as it looks.



all year comfort

our wooden floors know how to adapt. they feel warm beneath your feet when winter settles in, and stay naturally cool when summer sunlight pours in.



easy renovation

advantageous for renovations, easy installation under door frames, less difference in level to adjacent floors.



healthy living

free from pvc's, metals, plasticizers, ensures high indoor room air quality



for intensive use
class 33 - AC5



4 bevels



eir



all year
comfort



30 years*



10 x 238 x 1515mm



1 box :
07 pcs., 27.17ft²

discover the collection.

a shade for every story.

explore a curated palette of tones, each
handpicked to enrich every nook of your space.
from gentle whispers to bold statements, every
colour carries its own soul and grace.
beyond mere flooring—
it becomes the stage where your life unfolds its
beautiful tales.





4406 | mocha grain

1515 x 238 x 10 mm





4406 | mocha grain

1515 x 238 x 10 mm





4409 | smoke wood

1515 x 238 x 10 mm



4409 | smoke wood

1515 x 238 x 10 mm





4408 | frosted timber

1515 x 238 x 10 mm





4408 | frosted timber

1515 x 238 x 10 mm





4415 | honey wood

1515 x 238 x 10 mm



4415 | honey wood


1515 x 238 x 10 mm





4414 | autumn haze

1515 x 238 x 10 mm





4414 | autum haze

1515 x 238 x 10 mm



— ultra wide —
long planks

version 01/2025

	contains	m ²	ft ²
1 pack castello	07 planks	2.524 m ²	27.17 ft ²

product specifications

dimensions	1515 x 238 mm
total thickness	10 mm
bevels	4
click system	unilin/valinge
level of use according to European standard EN10874	23 heavy domestic use
	33 heavy commercial use
Residential warranty	30 years*
Commercial warranty	3-5 years*

*conditions apply

composition

surface layer	direct laminated paper, impregnated with melamine resin.
substrate	high density fiberboard (HDF).
backing	direct laminated paper, impregnated with melamine resin.

test results

abrasion resistance	EN13329	AC5 (IP≥6000)
impact resistance	EN13329 ISO	small ball : ≥ 70 mm - big ball : ≥ 1000 mm
thickness swelling	24336 EN13501-1	≤ 10%
fire resistance	EN7 17-1	Cfl-S1
formaldehyde emission	CARB	P2
slip resistance	EN438	DS
density	EN16581 EN425	>900 kg/m ³
resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
effect of a furniture leg	EN16581	no damage (foot type 0)
effect of a castor chair		no damage with type W wheels
thermal resistance	EN425	0,08 m ² K/W – suitable for floor heating/cooling.



1. protect

by lamparke floor is an easy-care, wear-resistant floor with a long lifespan and a hygienic hard surface. to protect your floor, we recommend the following actions :

- place a suitable doormat at your entrance(s) to absorb dirt and/or moisture.
- sand and dirt can have the effect of “sandpaper” and may cause premature wear and tear or scratches.
- place felt pads under the legs of chairs and tables to avoid scratches.
- equip other furniture and heavy objects with felt pads for safe moving.
- clear plastic mats must be used under office chairs with wheels.




indoor temperature and relative air humidity

by lamparke floor is produced from wood material that reacts on changes in the indoor climate. the ideal indoor climate for a laminate floor is a relative humidity between 40 and 60 % and a temperature between 18 and 25 °C.

static electricity

by lamparke floor is a partially insulating floor covering. if the relative humidity in the room is kept at around RH 50 % or more, then this will reduce the floor's ability to develop static charges.

2. clean



by lamparke floors are extremely easy to clean. in very little time and with a minimum of effort you can enjoy a clean and beautiful floor for many years.

dry cleaning methods

for daily cleaning, we recommend that you use a soft brush, vacuum cleaner or dry dust mop. microfiber mops are ideal.

wet cleaning methods

when cleaning with water, a well wrung-out cloth and lukewarm water are recommended. avoid using too much water.

don'ts:

- never use steam cleaners on a by lamparke floor
- never use highly concentrated soap solutions on the floor
- do not use organic detergents, they will leave a thin film of grease on the surface, resulting in visible footprints. only synthetic detergents are recommended.
- do not wax, varnish or polish the floor



lamparke —
walk on **art**

