

chateau

by lamparke

rooted in style,
**designed to
last**

B V E
walk on art

effortless elegance

Searching for a laminate floor that radiates charm and energy? **chateau** by lamparke is crafted to captivate with its dynamic character and stunningly realistic wood aesthetics. Designed to infuse warmth and vibrancy into any space, **chateau** is the perfect blend of beauty and functionality.

With scratch-resistant technology and effortless maintenance, this floor is built for modern living. Easy to install and designed to last, it's an invitation to experience style without compromise.

Discover effortless elegance with **chateau** – where timeless design meets everyday practicality.



Discover the collection.



easy to maintain



easy to install



scratch resistant



compatible with underfloor heating



residential warranty 20 years




1835x 238 x 12 mm

Class 23/32 | AC4

Experience the elegance of **chateau** by lamparke, a stunning collection featuring five refined walnut-inspired designs. From light to dark shades, with warm browns, soft beiges, and cool greys, these floors are crafted to complement any interior style.


Designed for grandeur and sophistication, **chateau** features extra-long and extra-wide planks, creating a seamless, expansive look that enhances the sense of space. These planks not only bring visual elegance but also reduce installation time and minimize seams, delivering a flawless, high-end finish.

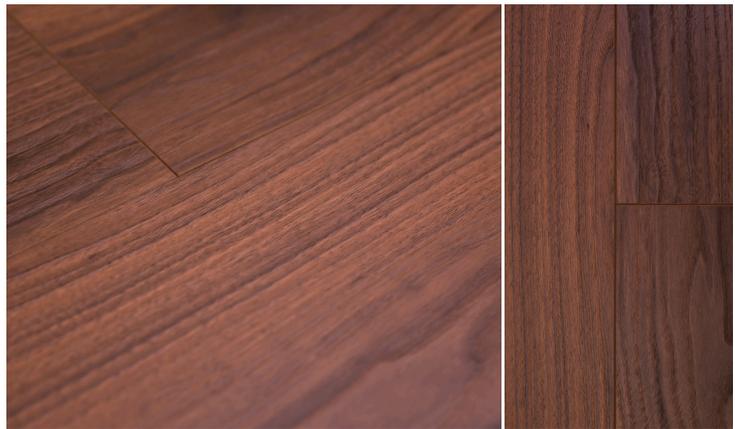

8210
Vineyard Dream



8205
Cool Grey





8211
Tree Scape




8206
Falcon Brown




8208
Dew Berry




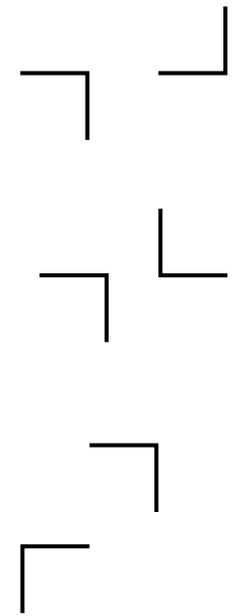


8210
Vineyard Dream

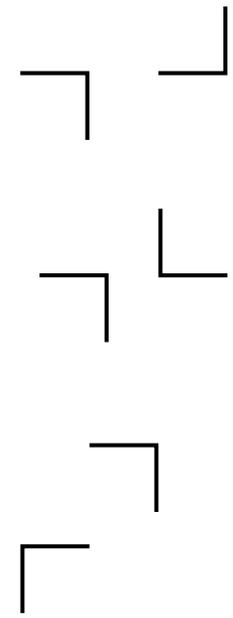


8211
Tree Scape

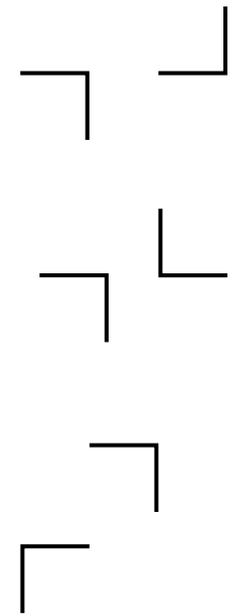

8205
Cool Grey

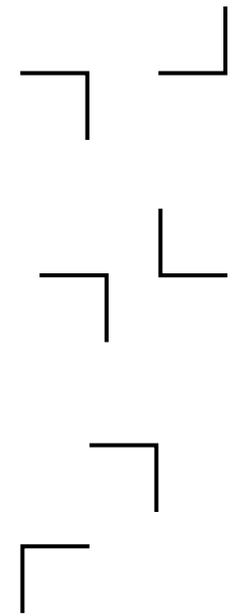

8206
Falcon Brown

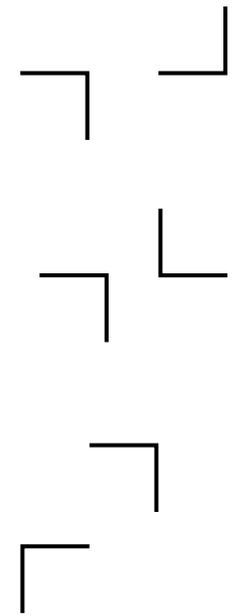

8208
Dew Berry

version 01/2025

| | contains | m ² | ft ² | weight |
|----------------|----------|---------------------|-----------------------|---------|
| 1 pack chateau | 6 planks | 2.62 m ² | 28.21 ft ² | 28.0 kg |

product specifications

| | |
|---|---------------------------|
| Dimensions | 1835 x 238 mm |
| Total thickness | 12 mm |
| Bevels | 4 |
| Click System | Unilin/Valinge |
| Level of use according to European standard EN10874 | 23 heavy domestic use |
| | 32 general commercial use |
| Residential warranty | 20 years |
| Commercial warranty | 3-5 years |

composition

| | |
|---------------|--|
| Surface layer | Direct laminated paper, impregnated with melamine resin. |
| Substrate | High Density Fiberboard (HDF). |
| Backing | Direct laminated paper, impregnated with melamine resin. |


test results

| | | |
|---|-----------------|---|
| Abrasion resistance | EN13329 | AC4 (IP≥4000) |
| Impact resistance | EN13329 ISO | small ball : ≥ 35 mm - big ball : ≥ 750 mm |
| Thickness swelling | 24336 EN13501-1 | ≤ 18% |
| Fire resistance | EN7 17-1 | Cfl-S1 |
| Formaldehyde emission | EN13893 EN323 | E1 |
| Slip resistance | EN438 | DS |
| Density | EN16581 EN425 | >850 kg/m ³ |
| Resistance to staining | ISO 8302 | 5 (groups 1+2) ; 4 (group 3) |
| Effect of a furniture leg | | no damage (foot type 0) |
| Effect of a castor chair | | no damage with type W wheels |
| Thermal resistance in combination with underlay Excellence Plus | | 0,08 m ² K/W – Suitable for floor heating/cooling. |



version 03/2023

What is a laminate floor made of?

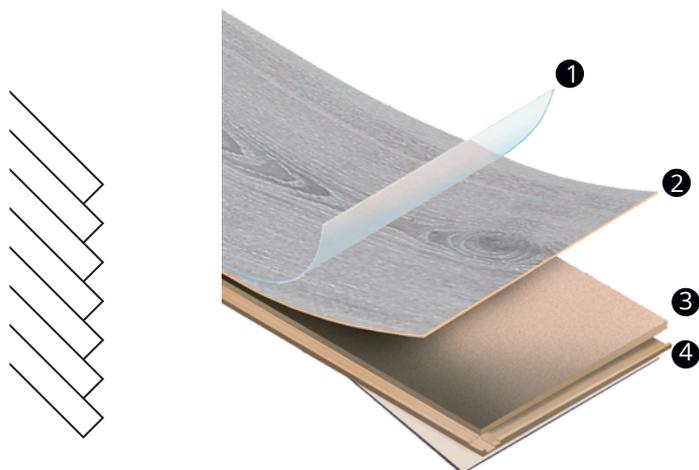

- ① An overlay that determines the strength and resistance of your floor
- ② A decor paper for the design
- ③ A high-density fibreboard (HDF) core
- ④ A counterbalance to stabilise and protect the HDF core


These instructions apply to all by lamparke DPL floors (Direct Pressure Laminate).

1. protect

By lamparke DPL is an easy-care, wear-resistant floor with a long lifespan and a hygienic hard surface.

To protect your floor, we recommend the following actions :

- Place a suitable doormat at your entrance(s) to absorb dirt and/or moisture.
Sand and dirt can have the effect of "sandpaper" and may cause premature wear and tear or scratches.
- Place felt pads under the legs of chairs and tables to avoid scratches.
- Equip other furniture and heavy objects with felt pads for safe moving.
- Clear plastic mats must be used under office chairs with wheels.

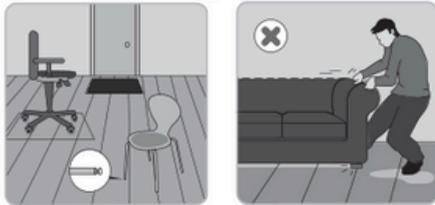

indoor temperature and relative air humidity

The by lamparke DPL floor is produced from wood material that reacts on changes in the indoor climate. The ideal indoor climate for a laminate floor is a relative humidity between 40 and 60 % and a temperature between 18 and 25 °C.

static electricity

By lamparke DPL is a partially insulating floor covering. If the relative humidity in the room is kept at around RH 50 % or more, then this will reduce the floor's ability to develop static charges.

2. clean



By lamparke laminate floors are extremely easy to clean. In very little time and with a minimum of effort you can enjoy a clean and beautiful floor for many years.

dry cleaning methods

For daily cleaning, we recommend that you use a soft brush, vacuum cleaner or dry dust mop. Microfiber mops are ideal.

wet cleaning methods

When cleaning with water, a well wrung-out cloth and lukewarm water are recommended. Avoid using too much water.

- don'ts:**
- Never use steam cleaners on a by lamparke DPL floor
 - Never use highly concentrated soap solutions on the floor
 - Do not use organic detergents, they will leave a thin film of grease on the surface, resulting in visible footprints. Only synthetic detergents are recommended.
 - Do not wax, varnish or polish the floor



chateau
by lamparke _____

