

impulse
— ultra wide —

by lamparke —
walk on **art**



**ultra
core**



AC5
25 Yrs.
warranty*

organic texture | ultra-wide format |
soft tones | built to last



ultra core

swell rate
<10%

black core

hdf density
>900kgs/m³

black hdf core: built tough, stays flawless

impulse flooring incorporates an ultra-dense black hdf (high-density fiberboard) core, engineered to provide superior structural integrity and resistance to moisture. the extreme density of this core significantly reduces water absorption, which minimizes swelling and warping even in high-humidity environments.

this enhanced stability ensures the flooring remains flat and durable over time, maintaining its flawless appearance and performance under daily wear and tear. designed for longevity, the black hdf core forms the backbone of a reliable, high-quality laminate floor.



100 h water
resistance*

water resistant
flooring

 **CARB²**
COMPLIANT


swell rate
<10%

structure at a glance



ultra-core laminate

thickness swelling rate is only **<10%**

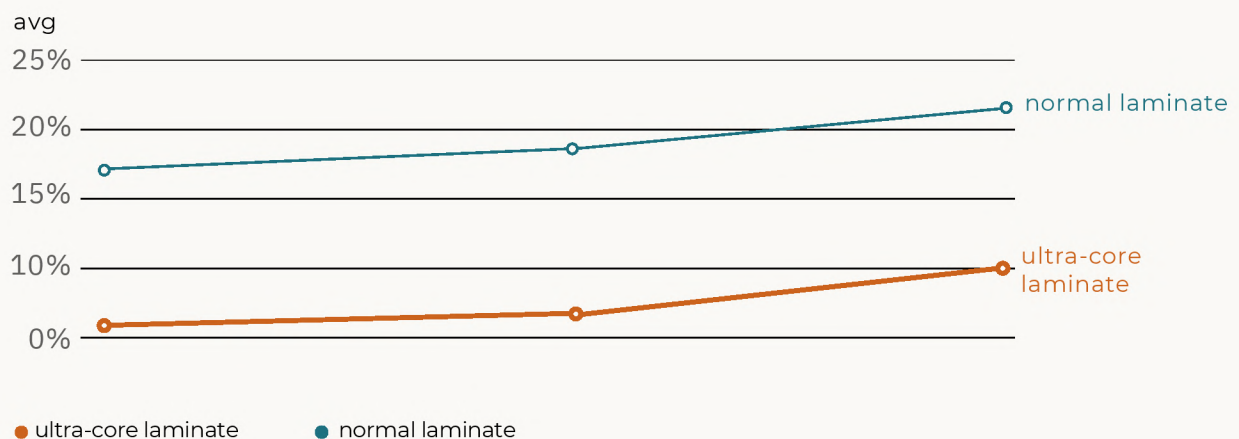



**experience bold
design and
unmatched durability
in ultra-wide, long
planks that define
modern spaces.**

impulse is designed for those who live life in the fast lane but never compromise on elegance.

this laminate flooring collection combines high durability with cutting-edge textures that capture the essence of contemporary living spaces.

featuring realistic embossed-in-register (eir) finishes, every ultra-wide and long plank reveals deep wood grains and natural cracks that bring warmth and character to your home or office.

with usage class 33, abrasion class 5, and a **30-year residential warranty**, this is beauty that endures—even when life never slows.

4906 | windsor grey



fast installation

fast installation, no wait with our advanced click system, installation is effortless—just lock the planks in place and you're ready to use. enjoy immediate results with a seamless finish.



comfort in every step

gentle underfoot and kind to your joints, this floor feels as good as it looks.



all year comfort

our wooden floors know how to adapt. they feel warm beneath your feet when winter settles in, and stay naturally cool when summer sunlight pours in.



easy renovation

advantageous for renovations, easy installation under door frames, less difference in level to adjacent floors.



healthy living

free from pvc's, metals, plasticizers, ensures high indoor room air quality



for intensive use
class 33 - AC5

4



4 levels



eir



all year
comfort



25 years*



8 x 238 x 1515mm



1 box :
08 pcs., 31.05ft²

discover the collection.


a color for every mood.

discover a refined collection of shades,
thoughtfully chosen to complement every corner
of your home.

from soft and subtle to deep and daring, each hue
brings its own charm and personality.

more than just flooring—

it's the foundation of your space, the backdrop to
your life's moments.

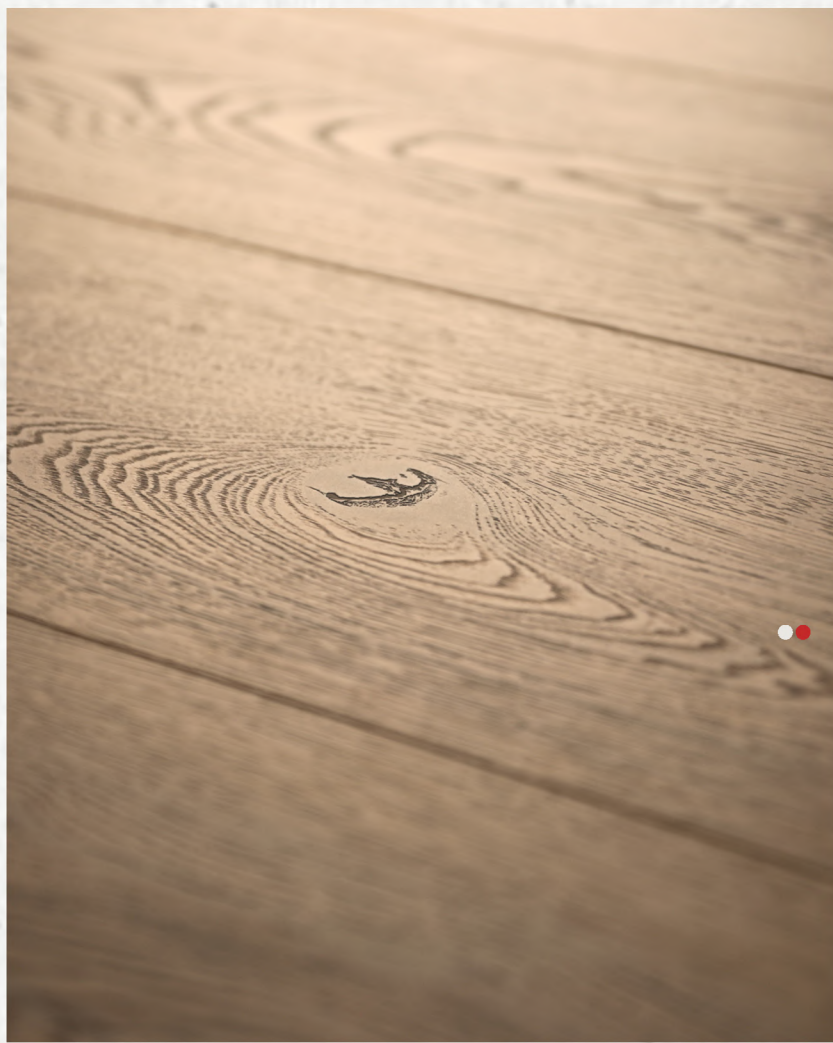



EIR



— ultra wide —
long planks



impulse | 4903 sable grain

standard plank 8 x 238 x 1515 mm	box 08 pcs 31.05 ft ²
-------------------------------------	---------------------------------------



EIR



— ultra wide —
long planks




impulse | 4909 copenhagen brown

standard plank
8 x 238 x 1515 mm

box
08 pcs | 31.05 ft²



EIR



— ultra wide —
long planks




impulse | 4904 regal drift

standard plank
8 x 238 x 1515 mm

box
08 pcs | 31.05 ft²



EIR




— ultra wide —
long planks



impulse | 4906 windsor grey

standard plank
8 x 238 x 1515 mm

box
08 pcs | 31.05 ft²






— ultra wide —
long planks



impulse | 4905 earlwood

standard plank
8 x 238 x 1515 mm

box
08 pcs | 31.05 ft²

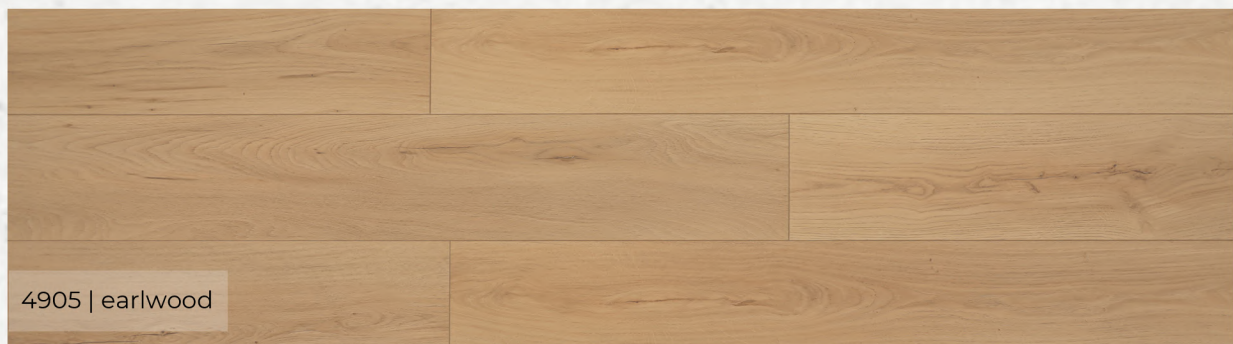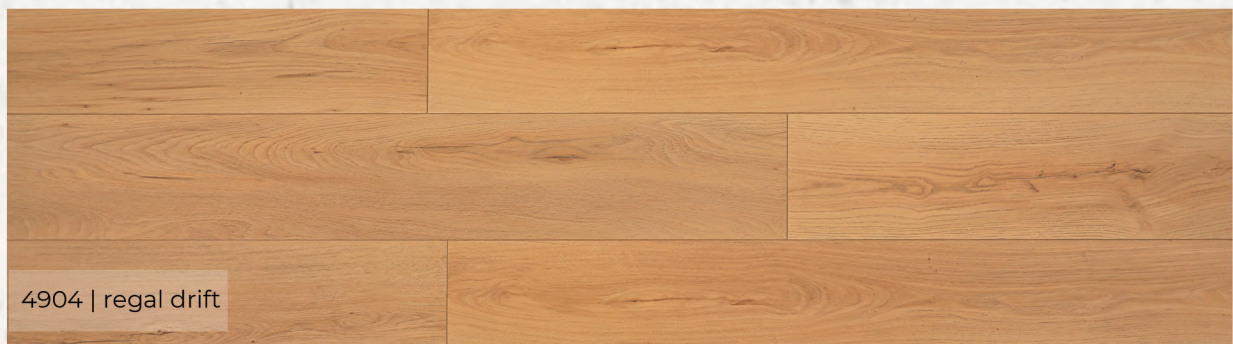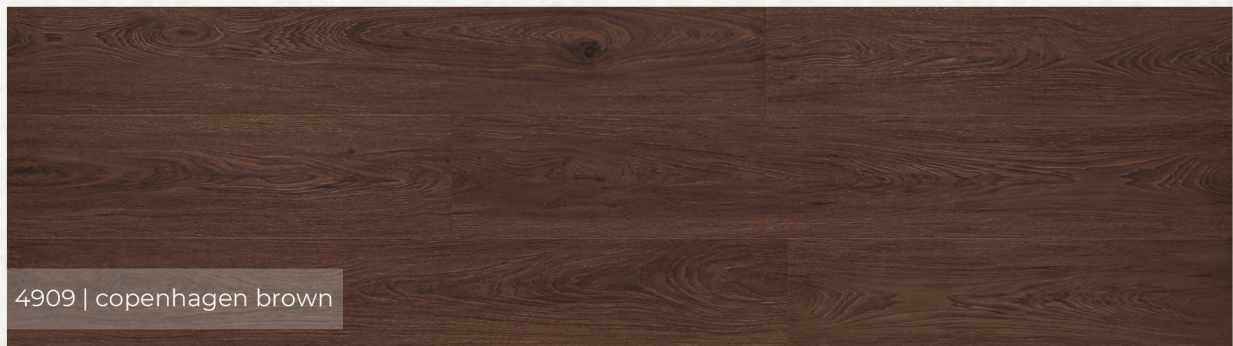

version 01/2025

	contains	m ²	ft ²
1 pack impulse	08 planks	2.884 m ²	31.05 ft ²

product specifications

dimensions	1515 x 238 mm
total thickness	08 mm
bevels	4
click system	unilin/valinge
level of use according to European standard EN10874	23 heavy domestic use
	33 heavy commercial use
Residential warranty	30 years*
Commercial warranty	3-5 years*

*conditions apply

composition

surface layer	direct laminated paper, impregnated with melamine resin.
substrate	high density fiberboard (HDF).
backing	direct laminated paper, impregnated with melamine resin.

test results

abrasion resistance	EN13329	AC5 (IP≥6000)
impact resistance	EN13329 ISO	small ball : ≥ 70 mm - big ball : ≥ 1000 mm
thickness swelling	24336 EN13501-1	≤ 10%
fire resistance	EN7 17-1	Cfl-S1
formaldehyde emission	EN13893 EN323	carb 2
slip resistance	EN438	DS
density	EN16581 EN425	>900 kg/m ³
resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
effect of a furniture leg	EN16581	no damage (foot type 0)
effect of a castor chair		no damage with type W wheels
thermal resistance	EN425	0,08 m ² K/W – suitable for floor heating/cooling.



1. protect

by lamparke floor is an easy-care, wear-resistant floor with a long lifespan and a hygienic hard surface. to protect your floor, we recommend the following actions :

- place a suitable doormat at your entrance(s) to absorb dirt and/or moisture.
- sand and dirt can have the effect of “sandpaper” and may cause premature wear and tear or scratches.
- place felt pads under the legs of chairs and tables to avoid scratches.
- equip other furniture and heavy objects with felt pads for safe moving.
- clear plastic mats must be used under office chairs with wheels.



indoor temperature and relative air humidity

by lamparke floor is produced from wood material that reacts on changes in the indoor climate. the ideal indoor climate for a laminate floor is a relative humidity between 40 and 60 % and a temperature between 18 and 25 °C.

static electricity

by lamparke floor is a partially insulating floor covering. if the relative humidity in the room is kept at around RH 50 % or more, then this will reduce the floor's ability to develop static charges.

2. clean



by lamparke floors are extremely easy to clean. in very little time and with a minimum of effort you can enjoy a clean and beautiful floor for many years.

dry cleaning methods

for daily cleaning, we recommend that you use a soft brush, vacuum cleaner or dry dust mop. microfiber mops are ideal.

wet cleaning methods

when cleaning with water, a well wrung-out cloth and lukewarm water are recommended. avoid using too much water.

don'ts:

- never use steam cleaners on a by lamparke floor
- never use highly concentrated soap solutions on the floor
- do not use organic detergents, they will leave a thin film of grease on the surface, resulting in visible footprints. only synthetic detergents are recommended.
- do not wax, varnish or polish the floor



lamparke —
walk on **art**

