

sens

by lamparke



forever stylish,  
**never boring**

**B V E**  
walk on art

# beautiful moments

## Authentic Wood Aesthetics

Immerse yourself in the beauty of our **matte, true-to-life wood decors**, crafted to mirror the elegance of real parquet. Every grain, knot, and shade has been meticulously selected by our experts to ensure unmatched authenticity.

## Refined Elegance in a Narrow Plank

At **146mm wide**, our narrow planks are designed to bring a sense of **timeless charm and sophistication** to any space. Their sleek profile enhances the natural flow of wood patterns, creating a more detailed and refined look.



# Discover the collection.



easy to maintain



easy to install



scratch resistant



compatible with underfloor heating



residential warranty 20 years



1218 x 146 x 8mm


Class 23/32 | AC4

Enjoy many beautiful moments with a floor that'll bring you a **step closer to nature.**


Taking craftsmanship a step further, we've created select designs using **high-definition scans of real wood**, capturing every grain and texture with stunning accuracy. The result? A floor that looks and feels as genuine as nature itself. **How incredible is that?**



3404  
Canyon Shadow

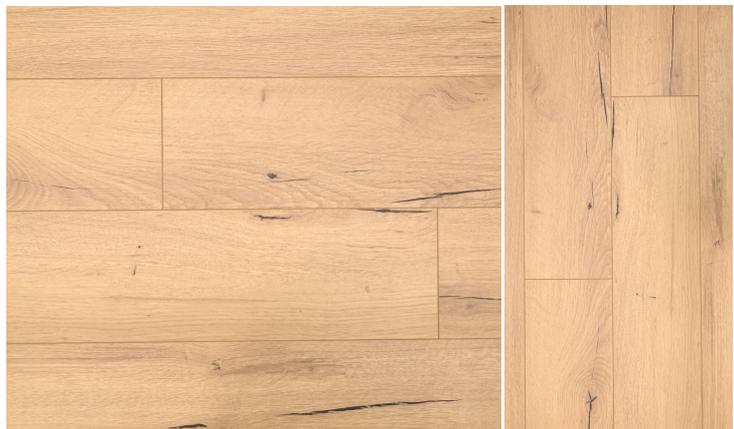

3490  
Sandy Breeze






3480  
Wild Mesa



3408  
Serene Mist

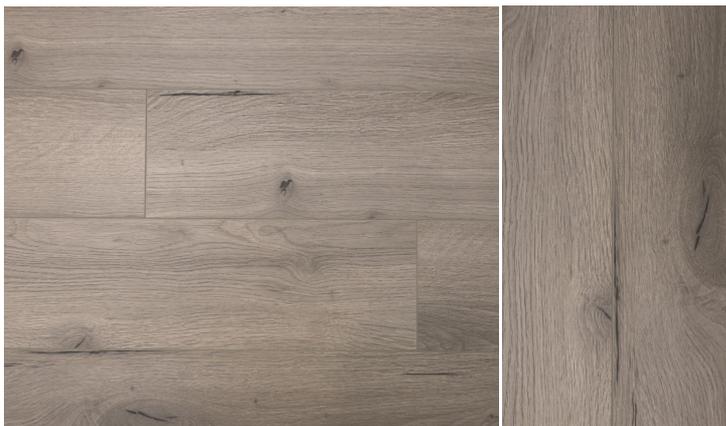

3419  
Mystic Grey





3403  
Golden Horizon




3410  
Ember Glow




3412  
Crimson Earth




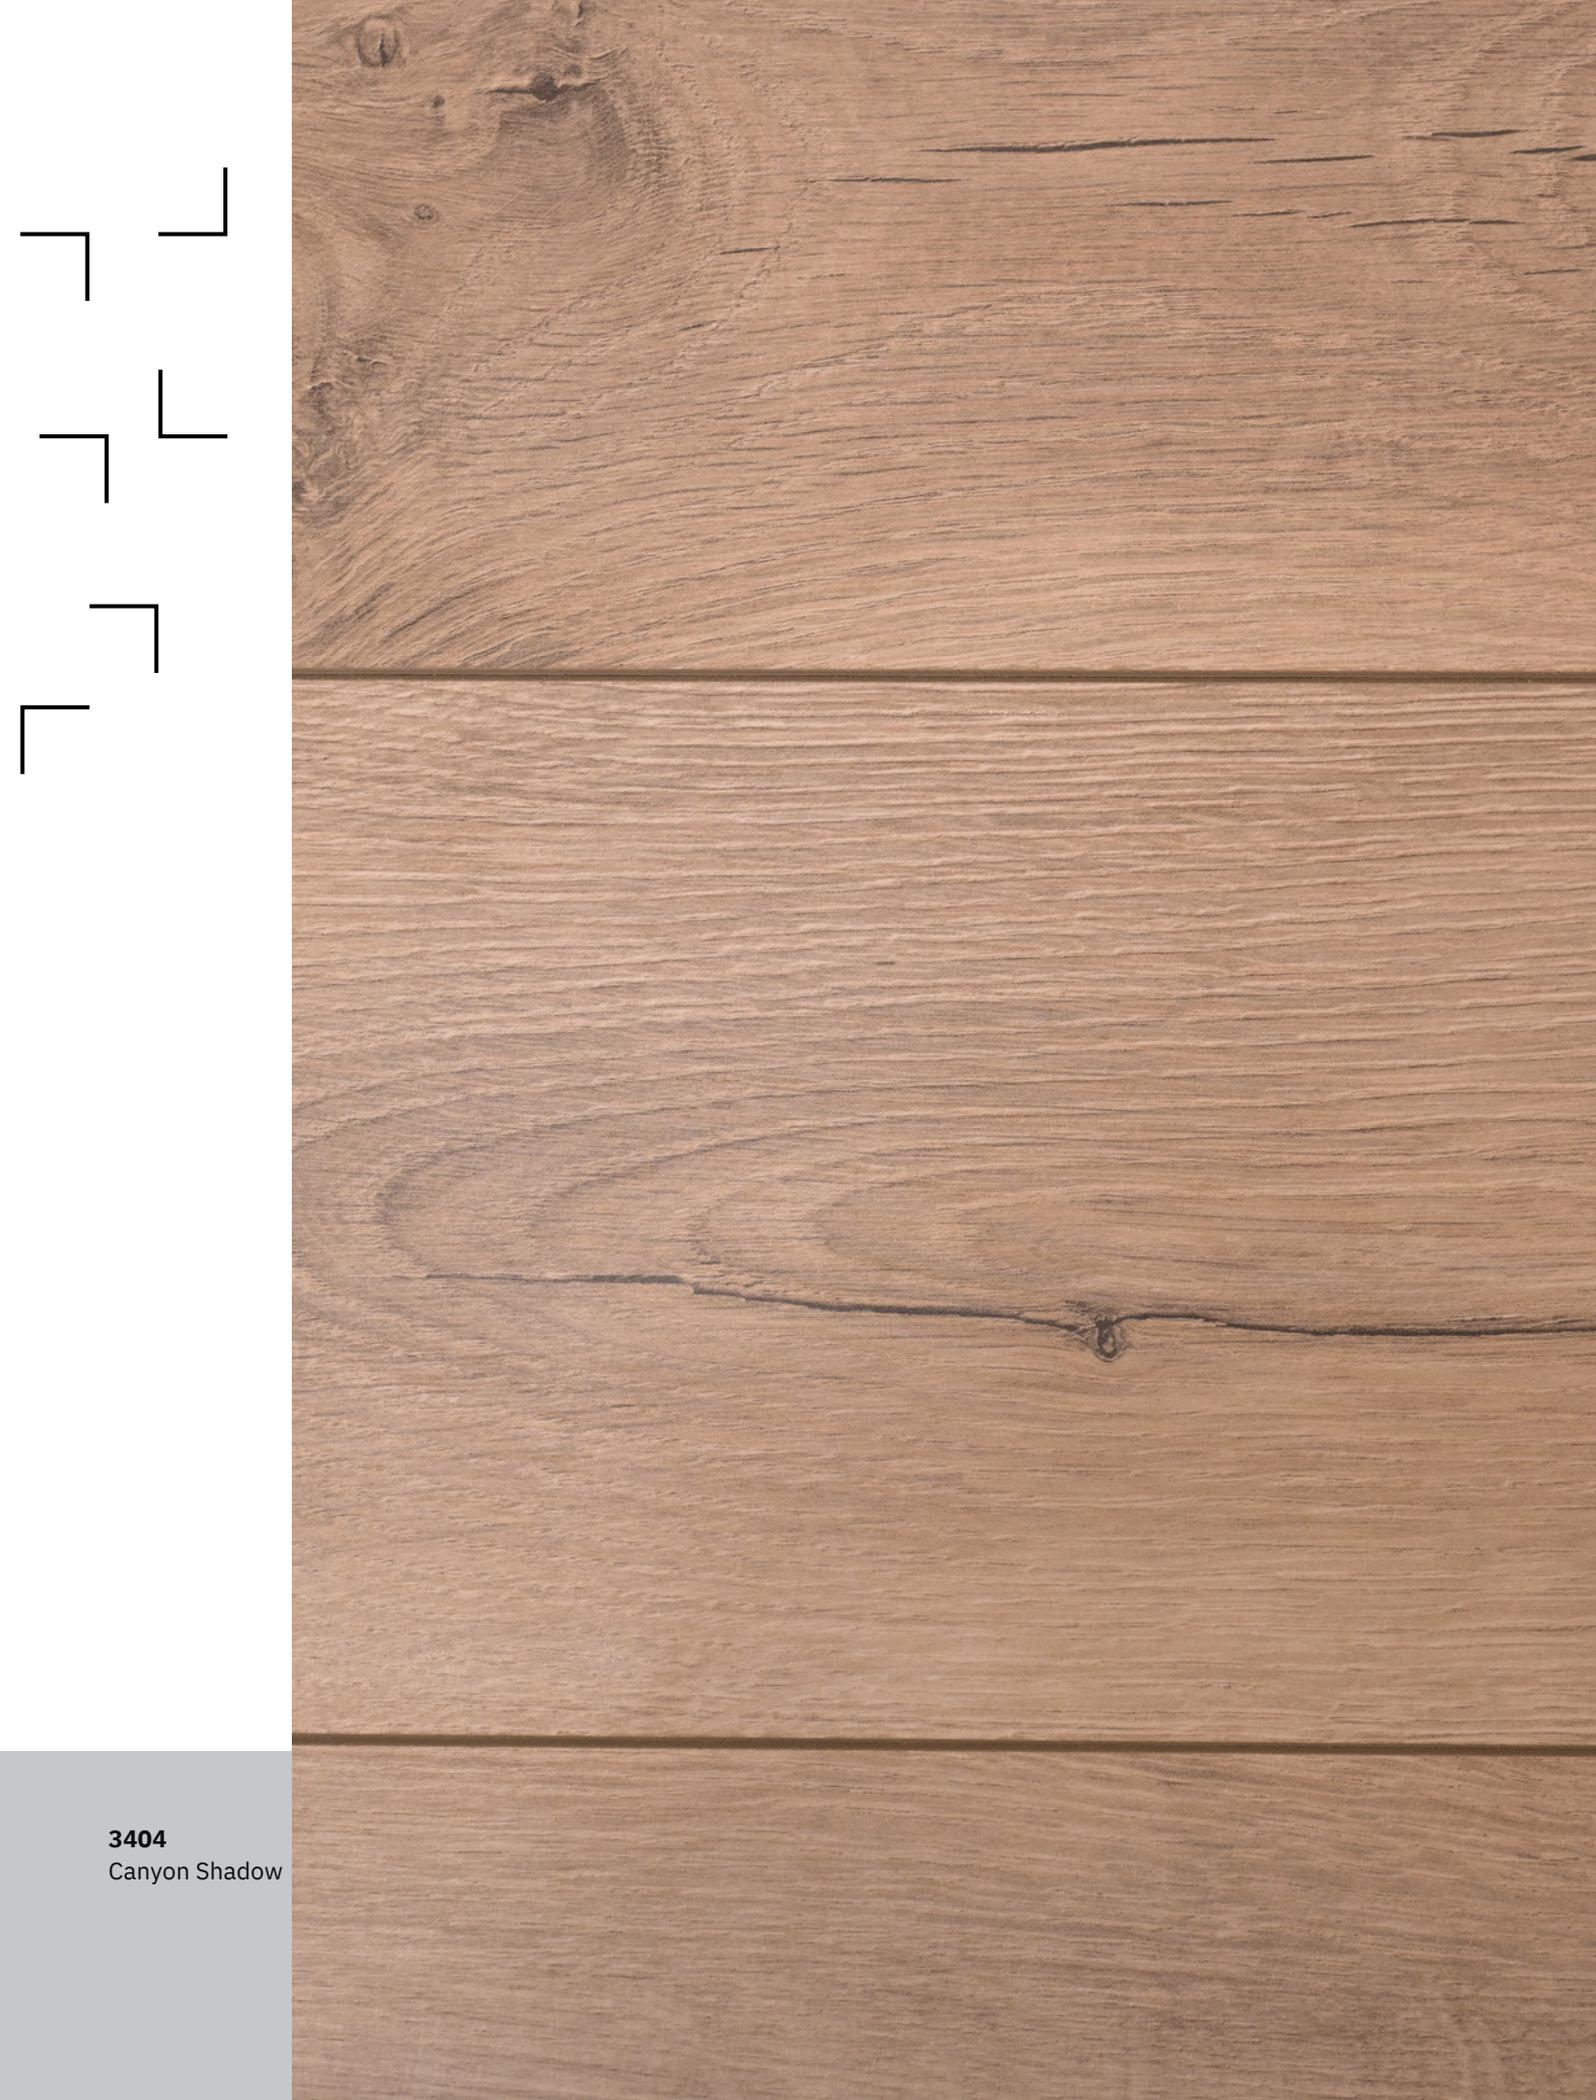


**3404**  
Canyon Shadow

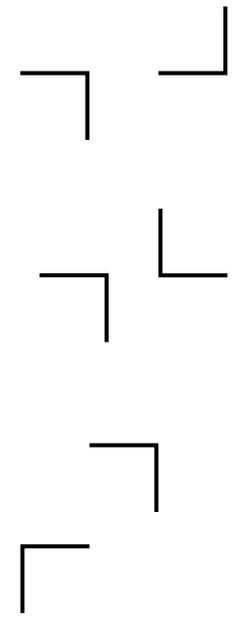


**3480**  
Wild Mesa

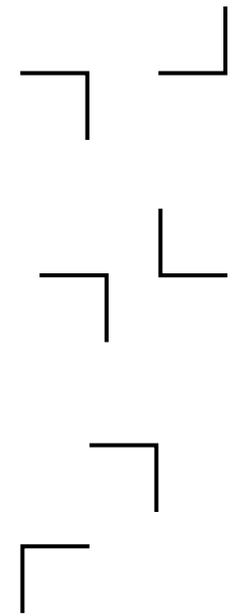


**3490**  
Sandy Breeze

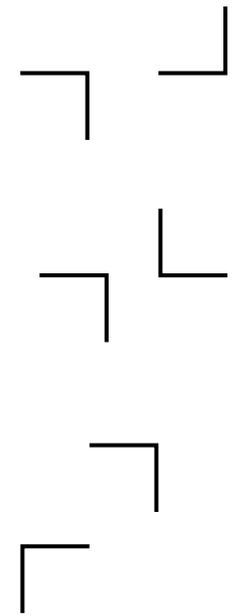


**3408**  
Serene Mist

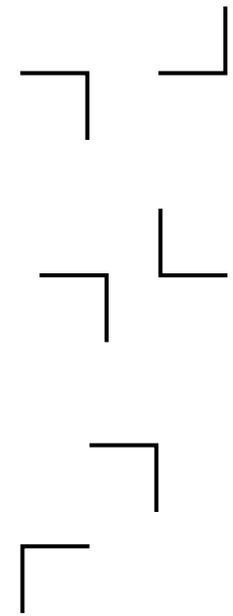


**3419**  
Mystic Grey

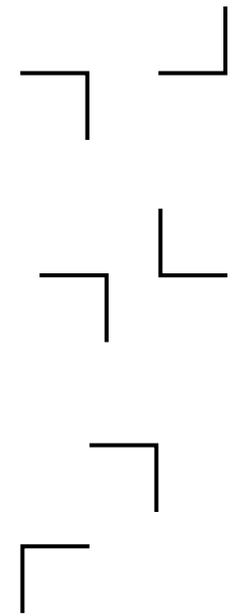

**3403**  
Golden Horizon

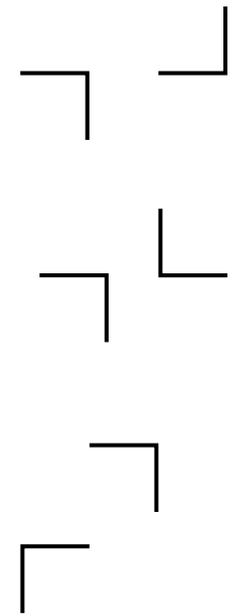

**3410**  
Ember Glow

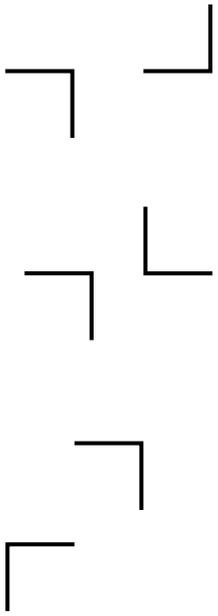

**3412**  
Crimson Earth

# sens

by lamparke \_\_\_\_\_

# Technical data.

version 01/2025

	contains	m <sup>2</sup>	ft <sup>2</sup>	weight
1 pack sens	10 planks	1.78 m <sup>2</sup>	19.14 ft <sup>2</sup>	13.0 kg

## product specifications

Dimensions	1218 x 146 mm
Total thickness	08 mm
Bevels	4
Click System	Unilin/Valinge
Level of use according to European standard EN10874	23 heavy domestic use
	32 general commercial use
Residential warranty	20 years
Commercial warranty	3-5 years

## composition

Surface layer	Direct laminated paper, impregnated with melamine resin.
Substrate	High Density Fiberboard (HDF).
Backing	Direct laminated paper, impregnated with melamine resin.

## test results


Abrasion resistance	EN13329	AC4 (IP≥4000)
Impact resistance	EN13329 ISO	small ball : ≥ 35 mm - big ball : ≥ 750 mm
Thickness swelling	24336 EN13501-1	≤ 18%
Fire resistance	EN7 17-1	Cfl-S1
Formaldehyde emission	EN13893 EN323	E1
Slip resistance	EN438	DS
Density	EN16581 EN425	>850 kg/m <sup>3</sup>
Resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
Effect of a furniture leg		no damage (foot type 0)
Effect of a castor chair		no damage with type W wheels
Thermal resistance in combination with underlay Excellence Plus		0,08 m <sup>2</sup> K/W – Suitable for floor heating/cooling.



**laminat.**

version 03/2023

What is a laminate floor made of?

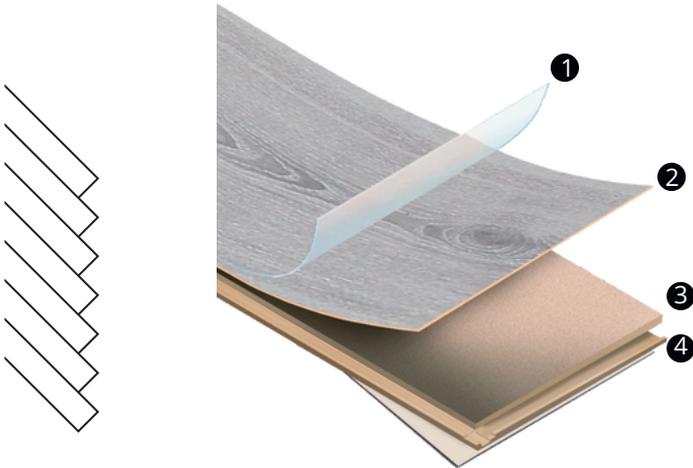

- ① An overlay that determines the strength and resistance of your floor
- ② A decor paper for the design
- ③ A high-density fibreboard (HDF) core
- ④ A counterbalance to stabilise and protect the HDF core


These instructions apply to all by lamparke DPL floors (Direct Pressure Laminate).

## 1. protect

By lamparke DPL is an easy-care, wear-resistant floor with a long lifespan and a hygienic hard surface.

To protect your floor, we recommend the following actions :

- Place a suitable doormat at your entrance(s) to absorb dirt and/or moisture.  
Sand and dirt can have the effect of "sandpaper" and may cause premature wear and tear or scratches.
- Place felt pads under the legs of chairs and tables to avoid scratches.
- Equip other furniture and heavy objects with felt pads for safe moving.
- Clear plastic mats must be used under office chairs with wheels.

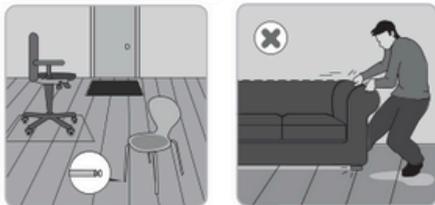

## indoor temperature and relative air humidity

The by lamparke DPL floor is produced from wood material that reacts on changes in the indoor climate. The ideal indoor climate for a laminate floor is a relative humidity between 40 and 60 % and a temperature between 18 and 25 °C.

## static electricity

By lamparke DPL is a partially insulating floor covering. If the relative humidity in the room is kept at around RH 50 % or more, then this will reduce the floor's ability to develop static charges.

## 2. clean



By lamparke laminate floors are extremely easy to clean. In very little time and with a minimum of effort you can enjoy a clean and beautiful floor for many years.

### dry cleaning methods

For daily cleaning, we recommend that you use a soft brush, vacuum cleaner or dry dust mop. Microfiber mops are ideal.

### wet cleaning methods

When cleaning with water, a well wrung-out cloth and lukewarm water are recommended. Avoid using too much water.

- don'ts:**
- Never use steam cleaners on a by lamparke DPL floor
  - Never use highly concentrated soap solutions on the floor
  - Do not use organic detergents, they will leave a thin film of grease on the surface, resulting in visible footprints. Only synthetic detergents are recommended.
  - Do not wax, varnish or polish the floor



**sens**  
by lamparke \_\_\_\_\_

