

WONDERFLOOR
Vinyl Flooring

www.wonderfloor.co.in

**PRIME
SERIES**




Timberworld
Luxury Vinyl Planks

Made in India

WONDERFLOOR
Vinyl Flooring

www.wonderfloor.co.in

Timberworld

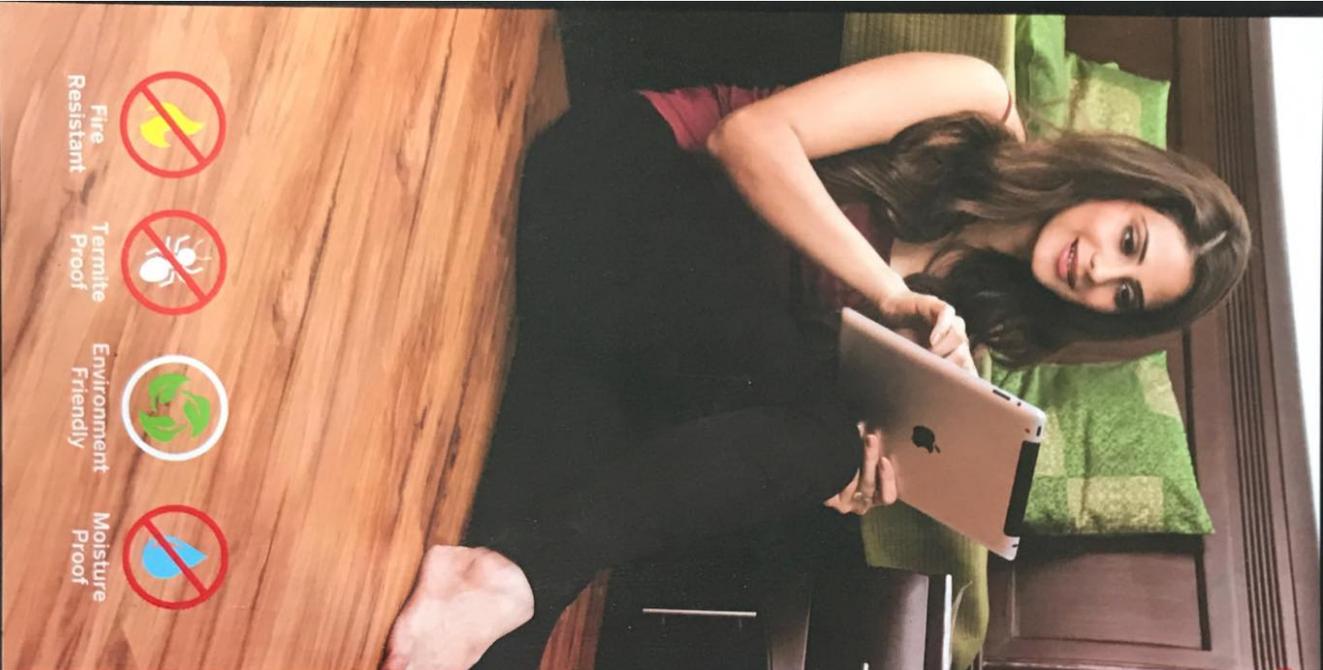

Fire
Resistant



Termite
Proof



Environment
Friendly



Moisture
Proof

WONDERFLOOR
Vinyl Flooring

www.wonderfloor.co.in

Timberworld



Luxury Vinyl Planks

Easy to install

Recommended areas for installation

- Hotels
- Guest Houses
- Restaurants
- Cafeterias
- Schools
- Home
- Office



When you install Wonderfloor products you are helping nature by preserving the usage of wood and natural stones. Our flooring are ecofriendly which contribute towards sustainable products.



Timberworld

1.50 mm Planks



NA 1



A 2



ZA 3



A 4

914.40 mm (36 inch)

Timberworld Plank Size:  152.40 mm (6 inch)



Timberworld

1.50 mm Planks



ZA 5



A 7



ZA 8



ZA 9

914.40 mm (36 inch)

Timberworld Plank Size:  152.40 mm (6 inch)



Timberworld

1.50 mm Planks



B1



NB 2



B3



NB 4

914.40 mm (36 inch)

Timberworld Plank Size:  152.40 mm (6 inch)



Timberworld

1.50 mm Planks



ZB 5



B 6




B 7



B 8

914.40 mm (36 inch)

Timberworld Plank Size:  152.40 mm (6 inch)

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

TIMBERWORLD is the latest collection of PVC wooden planks. The shades and designs are carefully chosen to complement the natural wood. Manufactured with multi-layer technology, this premium flooring is highly suitable to handle heavy footfalls. The PUR protection layer ensures trouble free performance and enhance durability. It reduces the noise impact, is trendy, quick to install, easy to use and maintenance free. Finally, Timberworld is termite resistant, moisture resistant & fire resistant. Timberworld planks are recommended for hotels, stores, malls, cafeteria, schools, banks, homes, offices etc.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	TIMBERWORLD RESULTS
OVERALL THICKNESS	EN 428 / IS: 3464	1.50MM
WEAR LAYER		0.1mm (HEAVY DUTY)
DIMENSION	EN 427 / IS: 3464	152.40 mm X 914.40mm (6" X 36")
SQUARENESS	IS: 3464	≤ 0.25 mm
ABRASION RESISTANCE	EN: 660-2	Wear Group P
FIRE RATING	EN1350-1	Bfl-S1
FLAMMABILITY HORIZONTAL RATE OF BURNING VERTICAL RATE OF BURNING	IS 15061	≤ 100 mm/min ARAI PASS
FLEXIBILITY AT 0°C (40 mm Mandrel)	Appendix A of IS: 3462	NO BREAK & CRACK
DIMENSIONAL STABILITY at 80°C/6hrs	Clause 5 of IS 3464	≤ 0.25 mm
COLOR FASTNESS	ISO 105 B02	CLASS 6
PEELING STRENGTH	Clause 12 of IS: 3464	≥ 1.05 kN/M
SLIP RESISTANCE	EN 13893	Class - DS
WATER RESISTANCE	Clause 18 of IS: 3464	≤ 0.10%
MOISTURE MOVEMENT	Appendix B of IS: 3462	≤ 0.40%
CASTOR CHAIR RESISTANCE	EN 425	PASS
RESISTANCE TO STAINING	EN 423	PASS
SURFACE PROTECTION	PUR	PUR
No of pcs / BOX		24 pcs
AREA/BOX		3.34 sq m (36 sq ft)

RECOMMENDATION FOR INSTALLATION

Timberworld planks must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl planks are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9711200510

For export enquiries, please e-mail : info@rmgpoly.com
or call : +91 9873138885



RMG POLYVINYL INDIA LIMITED

Registered Office : UGSR 4, Ansals Plaza, Sector 1, Vaishali Ghaziabad 201 010, (U.P) INDIA
Tel.: +91 120-4284802/803/804/805/806. Fax: +91 11 66173679
E-mail: info@rmgpoly.com

Regional Offices : • Ahmedabad: +91 9377262959 • Bangalore: +91 8088083037
• Bhubaneswar: +91 9337423999 • Chennai: +91 9380353335
• Chandigarh 91 9999143706 • Guwahati: +91 8822021287
• Hyderabad: +91 9533791422 • Indore: +91 7838590904
• Kolkata: +91 9582538009 • Kochi: +91 8893191421
• Lucknow: +91 9026708007 • Mumbai: +91 9323675979
• Pune: +91 9595191421 • Patna: +91 8252110100

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited www.wonderfloor.com

