


WONDERFLOOR
Vinyl Flooring

**Sigma
Wallspro**

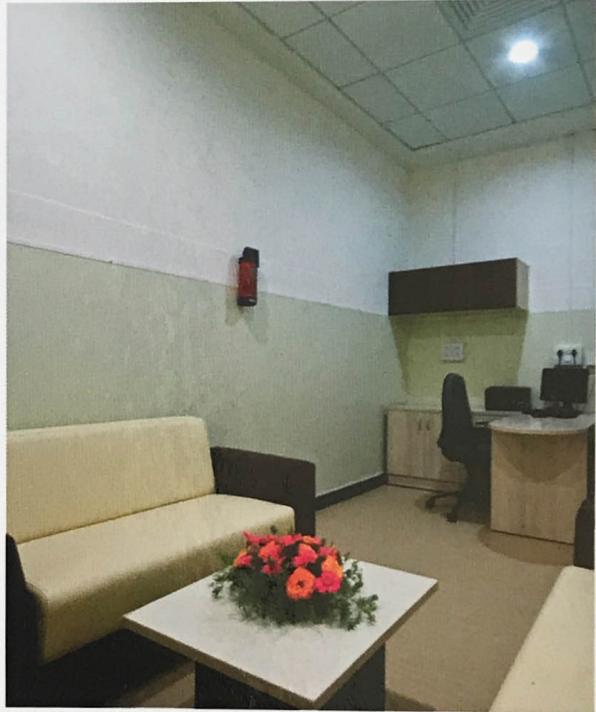

HIGH PERFORMANCE HEALTHCARE FLOORING AND WALL COVERING

-
- Antibacterial • Anti-Stain • Hard wearing homogeneous flooring
 - Flexible and impact resistant wall covering



Healthcare Flooring | Sigma



Mini Green




Mystic Green



Steel Grey



Aqua Blue

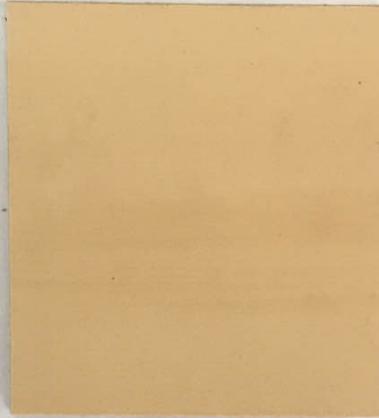

Pearl



Smoke Grey



Ruby Blue




Muddy Beige



Tangerine



PUR SURFACE PROTECTION

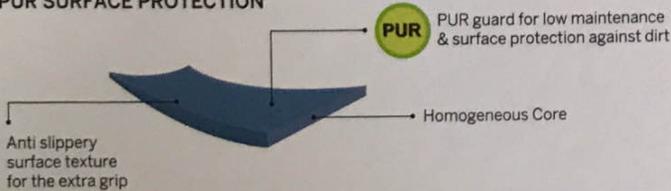

Wonderfloor's **Sigma** incorporates **WONDERGUARD** state of the art technology which have exhibited 99.9% inhibition in growth of microbial activity under test conditions and also support clean room condition requirements.

Application Areas:

- Hospitals (Pre & post care) • Blood banks • Pathology lab • Clean rooms • Pharmaceuticals (sterile & production area)
- Food industry etc • **"T" rating for best performance**



Wall Coverings

Wallspro



Forest Green



Rose White



Ivory



Sky Blue



Checks 01




Checks 02



Wallspro installed in a Hospital

Anti dirt smooth surface



PUR PUR guard for low maintenance & surface protection against dirt

Glass fibre for better dimensional stability (**GFT**)

Base Layer



Wonderfloor's **Wallspro range** incorporates **WONDERGUARD** state of the art technology which have exhibited 99.9% inhibition in growth of microbial activity under test conditions and also support clean room condition requirements.

Application Areas:

- Hospitals • Dispensaries • Pharma industries • Laboratories blood banks • Stores • Restaurant kitchens
- Schools • others etc.


WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	SIGGMA	WALLSPRO
THICKNESS (mm)	EN 428 / ISO 24346	2.00*	1.00
ROLL WIDTH (mtr)	EN 426 / ISO 24341	1.50*	2.00
ROLL LENGTH (mtr)	EN 426 / ISO 24341	20	20
TOTAL WEIGHT (kgs/sq mtr)	EN 430 / ISO 23997	3.20	1.40
SURFACE PROTECTION	PUR	PUR PROTECTION	PUR PROTECTION
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9	NA
HYGIENE / CLEAN ROOM TEST	ISO 14644-1	Inhibits Growth of Microbes, Class A	Inhibits Growth of Microbes, Class A
RESIDUAL INDENTATION (mm)	EN 433 / ISO 23343-1	≤ 0.10 mm	≤ 0.10 mm
FLEXIBILITY (mm)	EN 435 / ISO 24344	20 mm MANDREL. PASS	20 mm MANDREL. PASS
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.40%	≤ 0.10%
BEARING CASTOR CHAIR	EN 425 / ISO 4918	SUITABLE / CONTINUOUS	NA
FIRE PROPAGATION	BS 476 PART 6	(I)=10.8 (II)=1.7 } CLASS "O"	(I)=10.8 (II)=1.7 } CLASS "O"
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1	CLASS 1
ANTI-FUNGAL/ANTI-BACTERIAL TEST	ISO846 A,C / ISO 22196	>99% INHIBITS GROWTH	>99% INHIBITS GROWTH
REACTION TO FIRE (kw/m ²)	EN ISO 9239-1	> 8 / PASS Bfl-S1	> 8 / PASS Bfl-S1
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	34, 43	32, 33
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP T	WEAR GROUP M
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 4db	Δ LW = 2db
THERMAL RESISTANCE (m ² k/w)	EN 12664 / ISO 8302	<0.00568 - PASS	<0.00568 - PASS
STAIN RESISTANCE	EN 423 / ISO 26987	0, EXCELLENT RESISTANCE	0, EXCELLENT RESISTANCE
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 5	> BLUE WOOL STANDARD 5
MARITIME USAGES		SUITABLE	SUITABLE

* Siggma can be produced in 1.50mm/3.00mm thickness against bulk quantity

* Siggma tiles can be made available against bulk orders



MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9711200510

For export enquiries, please e-mail : info@rmgpoly.com
or call : +91 9873138885 / +91 9953208740



*Conditions Apply

RMG POLYVINYL INDIA LIMITED

Corporate Office: UGSR 4, Ansal Plaza, Sector 1, Vaishali, Ghaziabad 201 010, (Uttar Pradesh) INDIA
Tel.: +91 120-4284802/803/804/805/806, Fax: +91 11 66173679.

E-mail: info@rmgpoly.com, website: www.wonderfloor.co.in

Regional Offices : • Ahmedabad: +91 9377262959 • Bangalore: +91 9341263704 • Bhubaneswar: +91 9582624009
• Chennai: +91 9380353335 • Guwahati: +91 8822021287 • Hyderabad: +91 9533791422
• Indore: +91 7838590904 • Kolkata: +91 9582538009 • Kochi: +91 8893191421
• Lucknow: +91 9026708007 • Mumbai: +91 9323675979 • Pune: +91 9595191421
• Patna: +91 8252110100

www.rmgpoly.co.in, www.wonderfloor.co.in WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

