

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**TRENDO**

**PRIME  
SERIES**

**PUR**

**MADE  
in  
INDIA**

**Multi Purpose Flooring**  
(With anti-bacterial properties)

# TRENDO CHIPS



D BROWN




DAFFODILS




DK.GREY



F GREEN

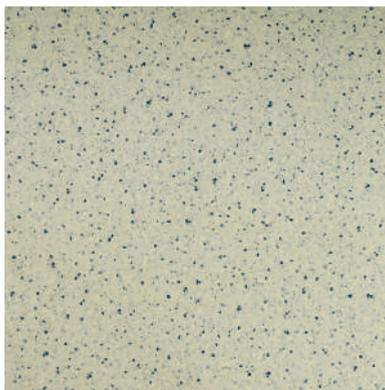

ICY BLUE

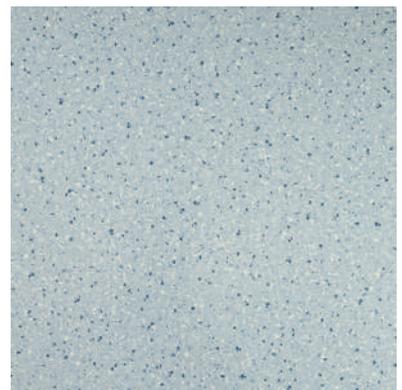

RIVER BLUE



ROYAL IVORY



S GREY



TERRACOTTA

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

# TRENDO WOOD



ASH WOOD TW 41



MAPLE WHITE TW 42



RED ALM TW 43



EUCALYPTUS TW 44

**WONDERFLOOR** - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

**Trendo** - Wonderfloor Trendo is a state-of-the-art multi application flooring produced keeping in mind the India quest for the latest trend, the climate conditions and the best abrasion resistance in the category. Trendo flooring is available in attractive design pattern, it is highly suitable for large working areas like offices, hospitals, libraries, educational institutes, stores, cafeterias and many other similar applications.

## PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	TRENDO RESULT
Thickness (mm)	EN 428 / ISO 24346	2.00
Total Weight (kgs/sq-mts)	EN 430	3.20 Kg/Sq. mtr
Rolls dimension (mtrs)	EN 426	2 mtr X 15 mtr
Surface Protection	PUR	PUR Protection (optional)
Thickness of wear layer (mm)	EN 429	0.35
Slip Resistance	DIN 51130 / ASTM D2047	R 9
Residual Indentation	EN433/ISO23343-1/ASTM F970	≤0.40mm
Flexibility (mm)	EN 435/ISO 24344/ASTM F137	20mm mandrel, passed
Dimension Stability (%)	EN 434/ISO 23999	≤0.10%
Bearing a castor chair	EN 425/ISO4918	Suitable / Continuous use
Performance Classification	EN 685/ISO10874	31,32
Thermal Resistance (m2k/w)	EN 12664/ISO 8302/ASTM 1514	<0.00568, passed
Hygiene / Clean room test	ISO 14644 - 1	Test result demonstrates it inhibits growth of microbes ClassA
Abrasion Resistance Volume loss (Weight loss/1000 cycles)	EN 660-2/EN 649/ASTMD 3389 (8)	Wear group P
Sound absorption	ISO 140-8, EN ISO 717-2	14DB
Stain Resistance	EN 423/ISO 26987	O, Excellent Resistance
Resistance to chemicals	ASTM F925	No visible change
Colour Fastness to daylight	ISO 105-B02/ASTM F1515	>Blue Wool Standard 5
Surface spread of flame	BS 476 PART 7	Class 1
Fire Propagation	BS 467 PART 6	(i) = 10.8 (ii) = 1.7 } Class "O"
Reaction to fire (kw/m2) - Class Type	EN ISO 9239-1 EN ISO 11925-2 EN 13501-1:2007+A ASTME - 648-06	CflS 1
Maritime Usage		Suitable



### RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Felvicol SR 998, Felvicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

### MAINTENANCE

**Do's:** • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

**Don'ts:** • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)

or call : +91 9711200510

For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com)

or call : +91 9873138885 / +91 9953208740

## RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

